



Automatic Drain with Y-Strainer Valve



Automatic Drain with Y-Strainer Valve

Order No. Description

130512	Automatic drain with Y-strainer valve
--------	---------------------------------------


Order No.
130512

Automatically Drains Water from Compressed Air Systems

- Use with air compressors, water separators and at drop legs — See properly piped shop diagram for install locations (pg. 42)
- Adjustable interval time and drain time
- Removable filter for easy cleaning
- Includes electric timer, 1/4" Y-strainer valve with filter screen and 6 ft. power cord



Refer to Service Bulletin: SB-6-184

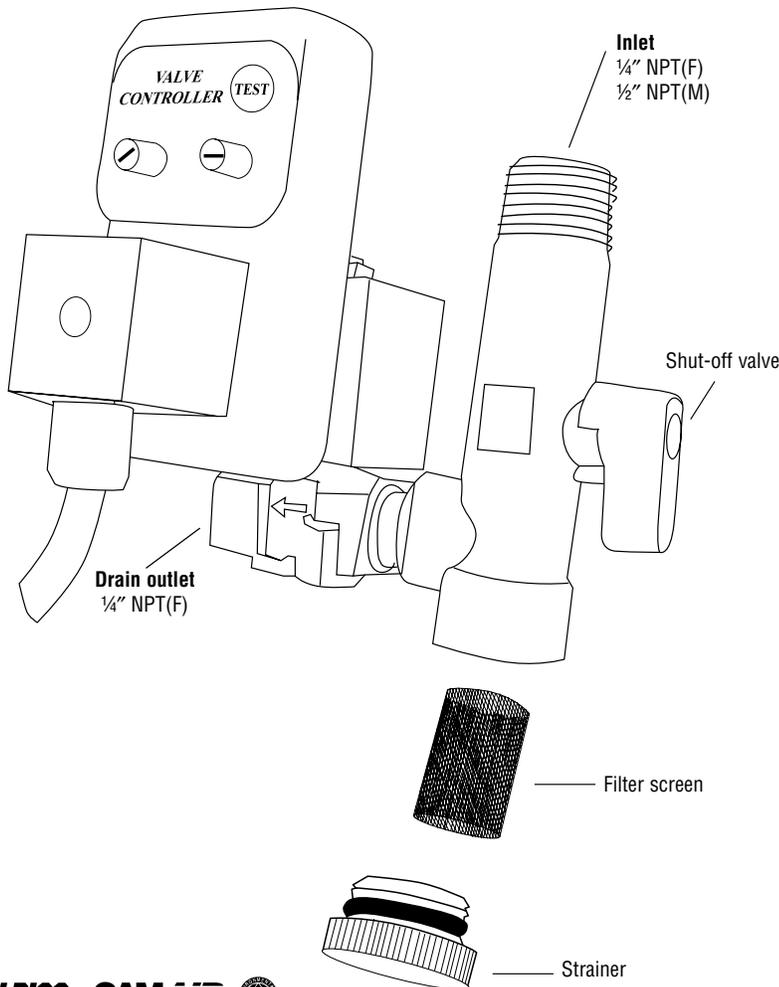

SPECIFICATIONS:

Timer

Interval time (T2)	.5 - 45 minutes
Discharge time (T1)	.5 - 10 seconds
Supply voltage	120v/60hz
Current Consumption	4mA Max.
Operating Temperature	-14°F to 122°F
Environmental Protection	NEMA 4
Case Material	ABS Plastic FR Grade

Valve

Type	2-way direct acting valve
In/Out Ports	1/4" NPT Female
Max. Working Pressure	230 PSI
Operating Temperature	36°F to 131°F Ambient
Media Temperature	194°F Max.
Valve Body	Forged Brass
Mounting	Any Position

Typical Installation

Drain can be mounted in any position and can be installed outside.

